


COOL SQUARE

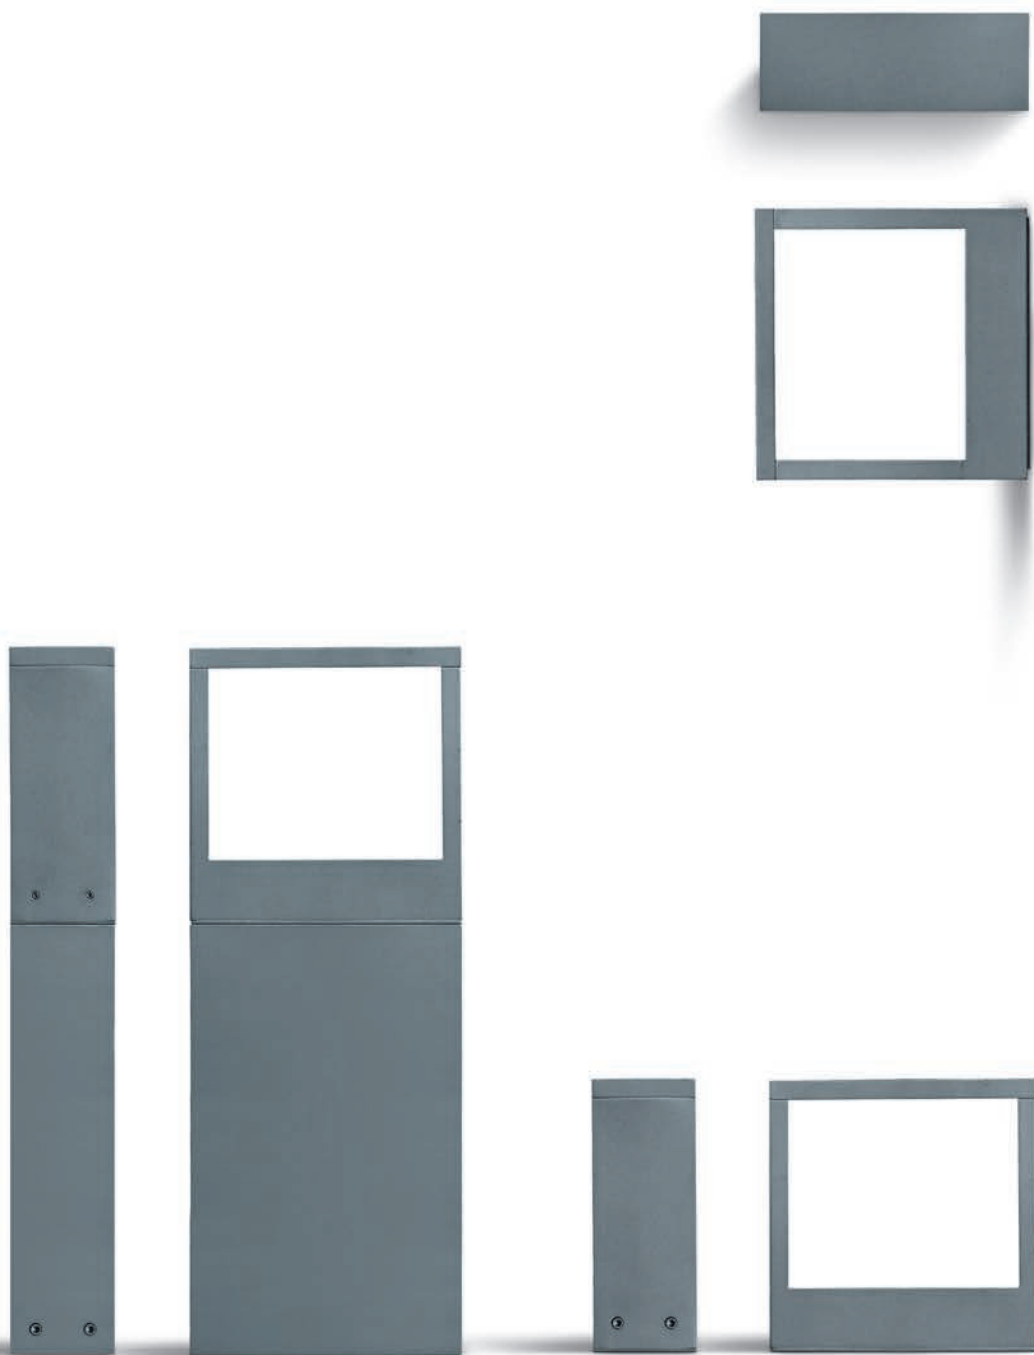

# COOL SQUARE

## CONSTRUCTION

Die-cast aluminum housing (copper free) with high corrosion resistance

Stainless steel fasteners

Tempered glass diffuser

Silicone gaskets

## FINISH SYSTEM

Double powder paint in 3 step process:

- surface treatment containing ceramic nano particles (Bonderite)
- epoxy primer paint
- polyester powder paint with high resistance against UV rays and harsh weather conditions

IP54

 LISTED FOR WET LOCATION

Supplied with LM80 tested LEDs

L70>50,000 hours

## COLORS

Cool Sq

- ☐ White (code 01)
- ☐ Aluminium grey (code 14)


Bollard

- ☐ Aluminum grey (code 14)




# COOL SQUARE

## COOL SQUARE WALL MOUNT




CODE	W	LUMENS	KELVIN	WIDTH
<b>S.7280W</b>	28.5W	1175 lm	3000K	8-5/8"
<b>S.7281W</b>	12.5W	483 lm	3000K	5-7/8"
<b>S.7282W</b>	7W	204 lm	3000K	3-3/4"

Also available in 4000K

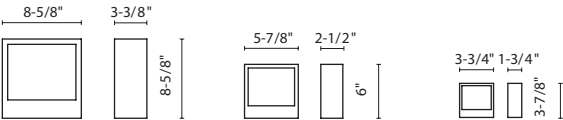

## COOL SQUARE BOLLARD



CODE	W	LUMENS	KELVIN	WIDTH
<b>S.7285W</b>	28.5W	1175 lm	3000K	8-5/8"
<b>S.7286W</b>	12.5W	483 lm	3000K	5-7/8"
<b>S.7287W</b>	7W	204 lm	3000K	3-3/4"

Also available in 4000K

