




Slim profile pendant luminaire available with direct and / or indirect illuminations. Frosted or microprismatic white PMMA diffuser provides a uniform distribution. Available as single modules or continuous runs with a wide distribution suitable for general lighting.

Luminaire characteristics:


Power input: 5.1W/ft to 11.2W/ft
Lumens: 418lm/ft to 1026lm/ft (3000K, 90CRI)
Luminaire efficacy: Up to 102lm/W

source:	High efficiency Osram LED (LM-80) 3000K: 90CRI, 3500K: 90CRI, 4000K: 90CRI.
Lumen maintenance:	90% of initial lumens at 90 000 hours (L90) (LM-79).
Optics:	General light frosted and microprismatic.
Material:	Body: Extruded aluminum profile with die-cast end caps. Diffuser: PMMA Mounting: Stainless steel suspension cable, power cable and die-cast canopy.
Mounting:	Supplied with a 5' (1.5m) long ultra thin suspension aircraft cable (field adjustable) and canopy. To be installed on a standard 4" octagonal junction box.
Electrical:	Integral high efficiency electronic LED driver, rated 50 000 hours, 120-277V. Supplied standard with one circuit. Two circuits available upon request with additional canopy.
Dimming:	0-10V (120-277V), down to 1% or leading (TRIAC) and trailing edge (ELV) (120V only), down to 5%.
Finish:	Available in white RAL9003 or black RAL9004, gray RAL9006 available on request. The canopy is supplied white, other finishes available on request.
Weight:	1.48 lbs/ft (0.67kg/ft)
Warranty:	5 year limited warranty.
Ratings:	IP20
Certification:	 cULus listed for damp location. Interior use only.

MADE IN CANADA.

FAMILY OVERVIEW

Linear small family offers a wide range of mounting and optic options for multiple applications

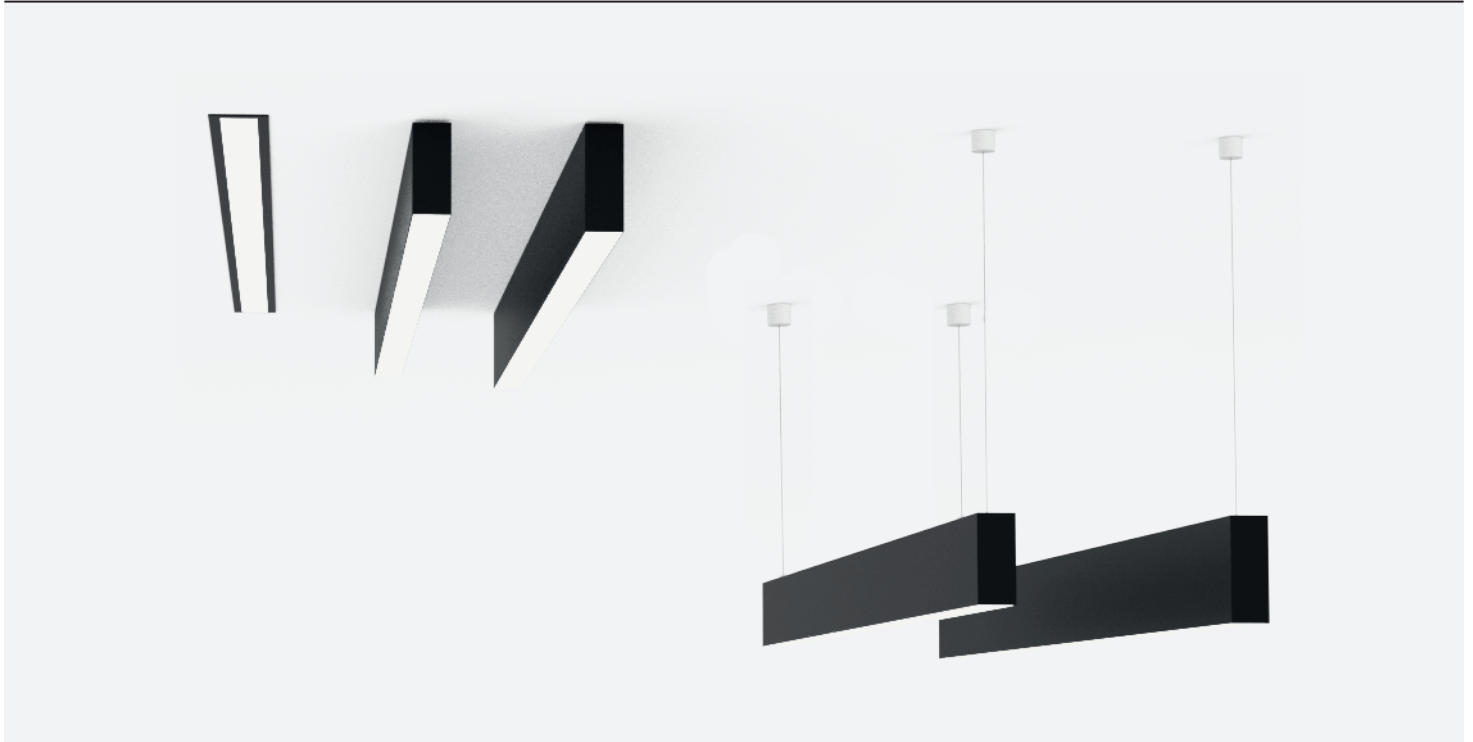


GENERAL LIGHT
MICROPRIMASTIC

GENERAL LIGHT
FROSTED

LOW VOLTAGE
48V TRACK

LASER BLADE XS
coming soon


Powered by **iGuzzini**

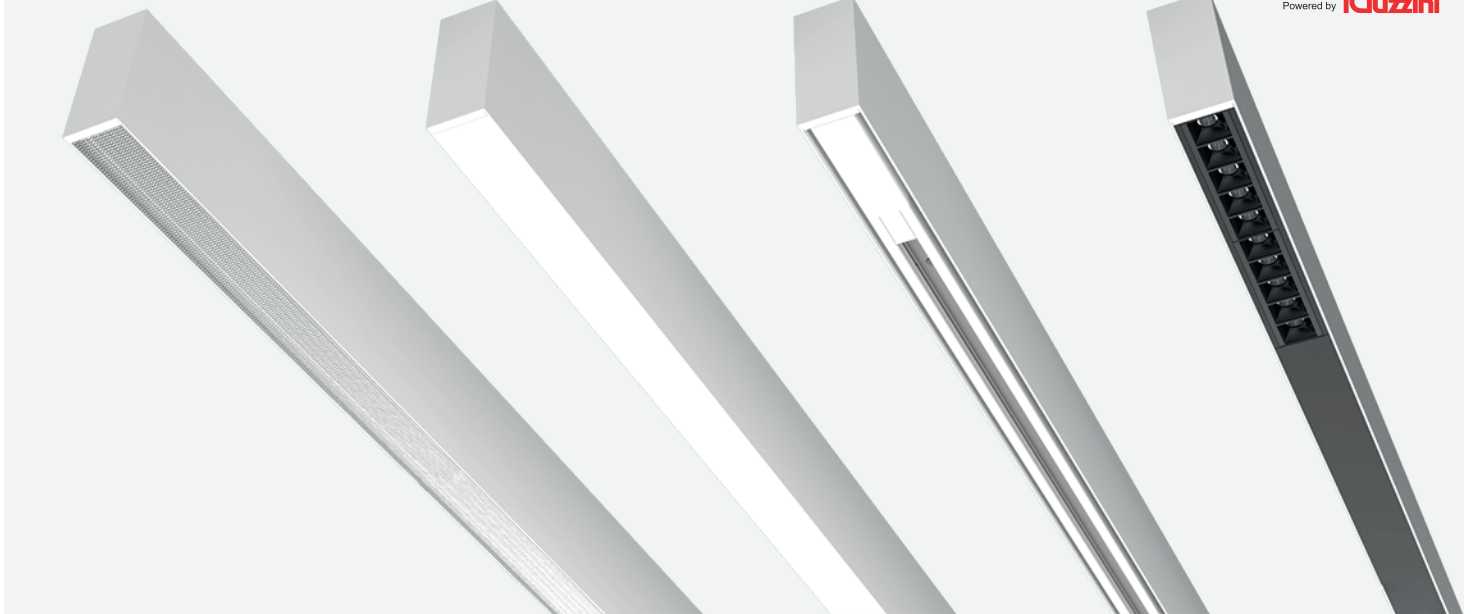

PRODUCT FEATURES

PROPRIETARY LED PLATFORM

Superior thermal management for reliable color consistency and optimized output performance.

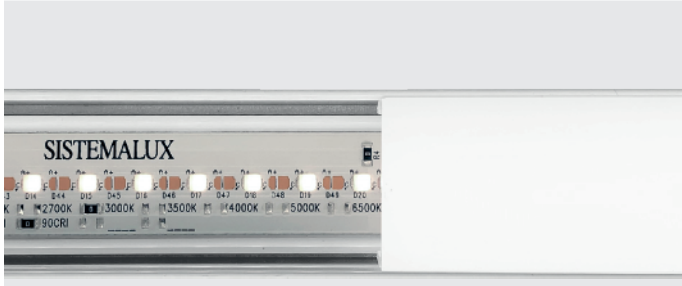


PROFESSIONAL GRADE OPTICS

PMMA premium quality optics designed for visual comfort and performance.




SOPHISTICATED SLIM PROFILE

Minimalist slim shape for subtle integration with architecture.

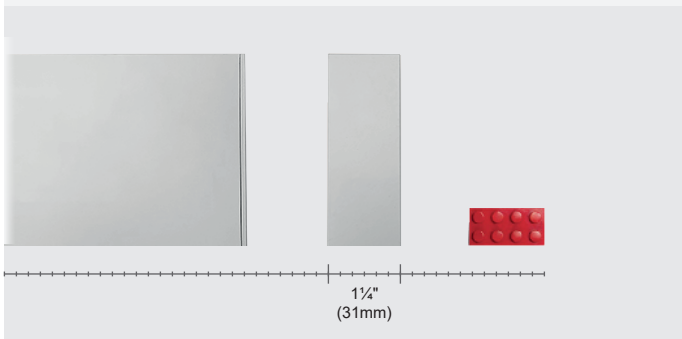


HIDDEN SUSPENSION ADJUSTMENT MECHANISM

Cable adjustment and lock mechanism designed to be invisible to keep a clean look.

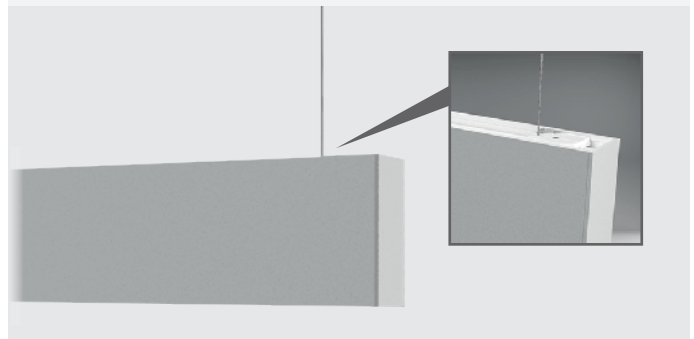


SIZE COMPARISON

Smaller form factor with no compromise on the performance.

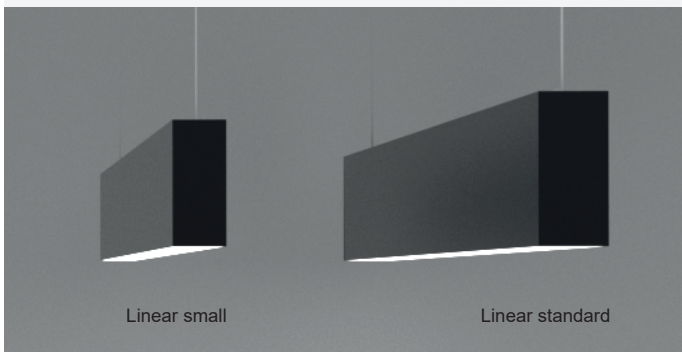


ILLUMINATED MECHANICAL JOINERS


Provides a continuous light without "dead zones" in between units.

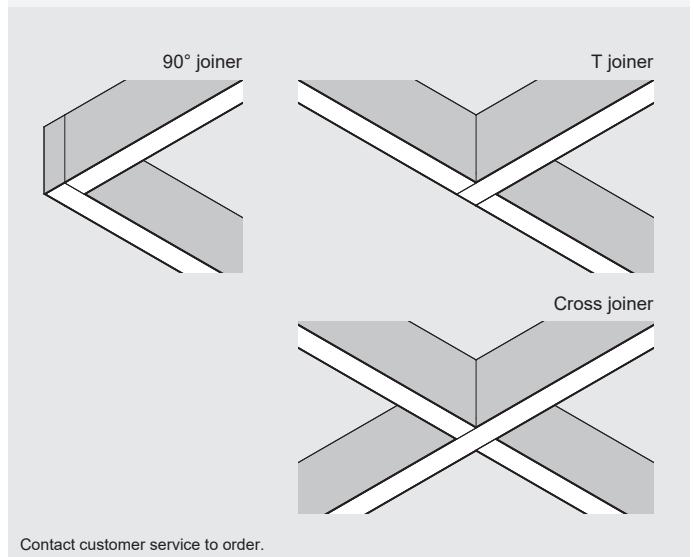

DIMENSIONS

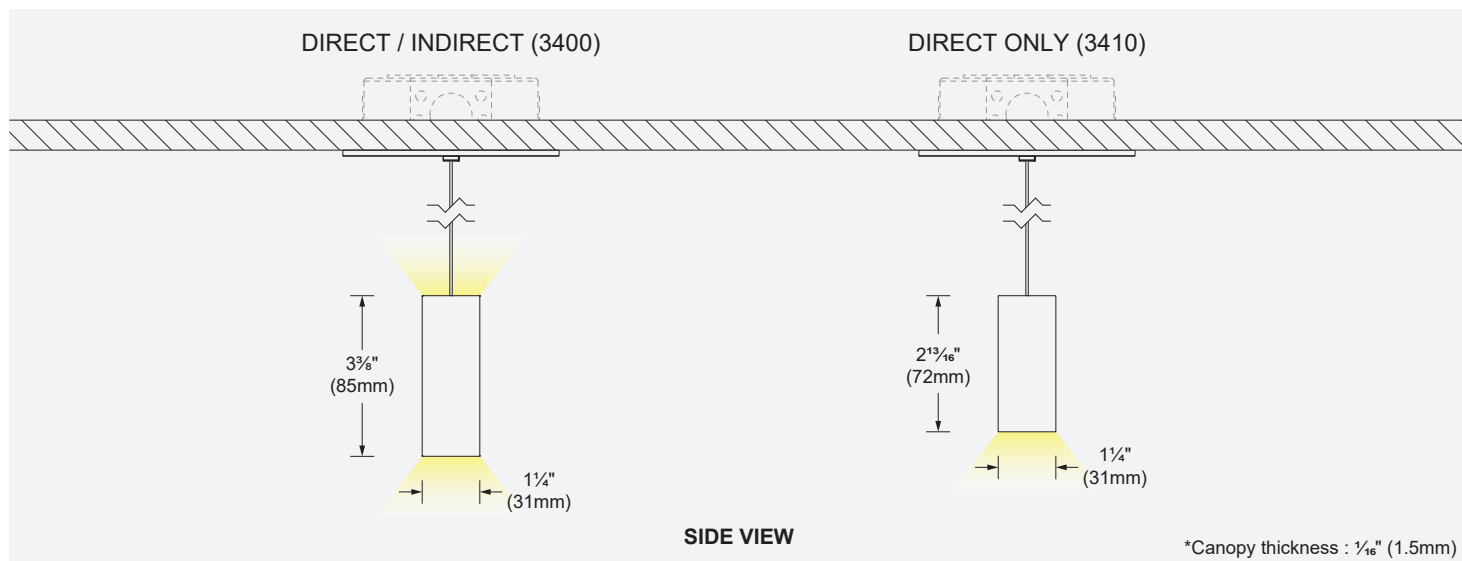

LENGTHS

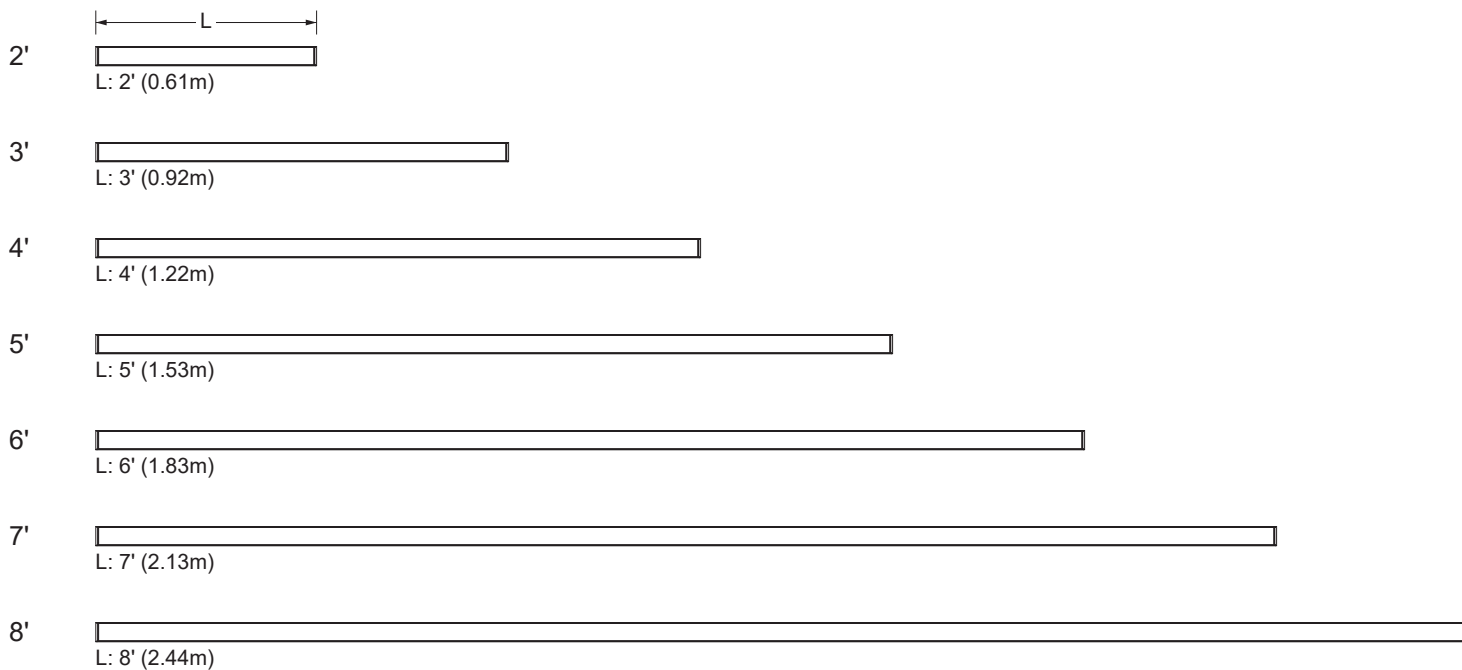

Longer lengths available. See ordering info p.6.

LED COLOR FIDELITY DATA

CCT	R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15	Rf	Rg	Melanopic ratio
3000K	91	94	96	91	91	93	92	80	54	86	91	83	92	97	87	91	100	0.535
3500K	95	96	95	94	94	94	94	87	67	88	95	80	95	96	92	92	101	0.641
4000K	92	100	94	94	91	94	93	91	77	84	93	71	94	95	93	92	100	0.716

PHOTOMETRIC DATA


Visit sistemalux.com for complete photometric data.

INDIRECT OUTPUT


CCT (K)	CRI	OUTPUT	LOAD (W / ft)	OPTIC	LUMENS (lm / ft)	EFFICACY (lm / W)	MODELS
3000K	90	BO	5.1W/ft	Frosted	418	81	3400-BO-930-F
				Microprismatic	524	102	3400-BO-930-M
		MO	7.6W/ft	Frosted	619	81	3400-MO-930-F
				Microprismatic	770	101	3400-MO-930-M
		HO	10.3W/ft	Frosted	752	73	3400-HO-930-F
				Microprismatic	1 004	97	3400-HO-930-M

*USE MULTIPLIER TABLE FOR OTHER CCT AND CRI OUTPUT DATA


BO Frosted (3000K, 90CRI)




MO Frosted (3000K, 90CRI)




HO Frosted (3000K, 90CRI)




BO Microprismatic (3000K, 90CRI)



MO Microprismatic (3000K, 90CRI)



HO Microprismatic (3000K, 90CRI)



CCT options	3000K	3500K	4000K
CRI options	90CRI	90CRI	90CRI
Multiplier	1	1.03	1.06

PHOTOMETRIC DATA


Visit sistemalux.com for complete photometric data.

DIRECT OUTPUT


CCT (K)	CRI	OUTPUT	LOAD (W / ft)	OPTIC	LUMENS (lm / ft)	EFFICACY (lm / W)	MODELS
3000K	90	BO	5.6W/ft	Frosted	439	78	3400-BO-930-F
				Microprismatic	537	95	3400-BO-930-M
		MO	8.3W/ft	Frosted	641	77	3400-MO-930-F
				Microprismatic	785	94	3400-MO-930-M
		HO	11.2W/ft	Frosted	831	74	3400-HO-930-F
				Microprismatic	1 026	91	3400-HO-930-M

*USE MULTIPLIER TABLE FOR OTHER CCT AND CRI OUTPUT DATA


BO Frosted (3000K, 90CRI)




MO Frosted (3000K, 90CRI)




HO Frosted (3000K, 90CRI)




BO Microprismatic (3000K, 90CRI)



MO Microprismatic (3000K, 90CRI)



HO Microprismatic (3000K, 90CRI)



CCT options	3000K	3500K	4000K
CRI options	90CRI	90CRI	90CRI
Multiplier	1	1.03	1.06

INSTALLATION OPTIONS (INCLUDED)


DEFAULT OPTION

The aircraft cable suspension and power cable terminate at the canopy.



ALTERNATE OPTION

The aircraft cable suspension terminates in the ceiling while the power cable and the canopy cover can be located independently.



MOUNTING ACCESSORIES (TO BE ORDERED SEPARATELY)

*for installation consult the instruction sheet

- 3637** - Accessory for T-Bar Mounting (White) 1 Kit includes 2 anchors
*for installation consult the instruction sheet



Length	# of kits needed
Up to 8'	1
8' to 24'	2
25' to 40'	3
41' to 56'	4
57' to 72'	5
73' to 88'	6
89' to 96'	7

ORDERING INFO

_____ - _____
FIXTURE



MODEL

- 3400** - Direct & indirect **3410** - Direct only

LENGTH

_____ 2' to 96'

INDIRECT OUTPUT*

- NO** - None⁽¹⁾ **BO** - Base output⁽¹⁾ **MO** - Medium output⁽¹⁾ **HO** - High output⁽¹⁾

DIRECT OUTPUT*

- NO** - None **BO** - Base output **MO** - Medium output **HO** - High output

LED

- 930** - 3000K, 90CRI **935** - 3500K, 90CRI **940** - 4000K, 90CRI

INDIRECT OPTIC

- N** - None (cover plate)⁽¹⁾⁽²⁾ **F** - Frosted⁽¹⁾ **M** - Microprismatic⁽¹⁾

DIRECT OPTIC

- N** - None (cover plate)⁽³⁾ **F** - Frosted **M** - Microprismatic

VOLTAGE

- 120** - 120V **UNV** - 120-277V

FINISH⁽⁴⁾

- 01** - White **02** - Black

DIMMING

- D01** - 0-10V (down to 1%) **LTE** - Leading and trailing edge (120V only) (down to 5%)

*For 02 feet length, indirect and direct outputs will be the same.

⁽¹⁾ Available for direct & indirect (**3400**) model.

⁽¹⁾ Available for no (**NO**) indirect output.

⁽²⁾ Available for no (**NO**) direct output.

⁽³⁾ Gray finish available on request, contact customer service for more information.