


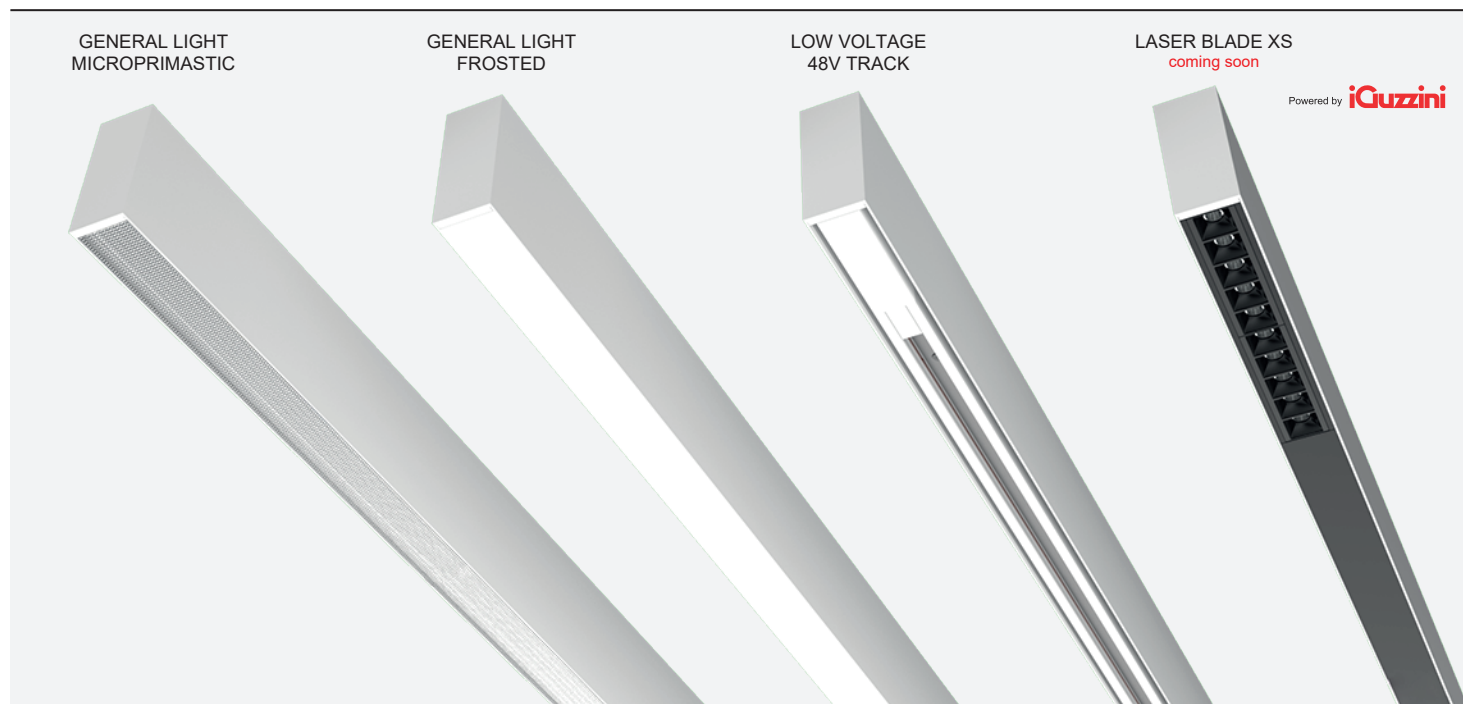
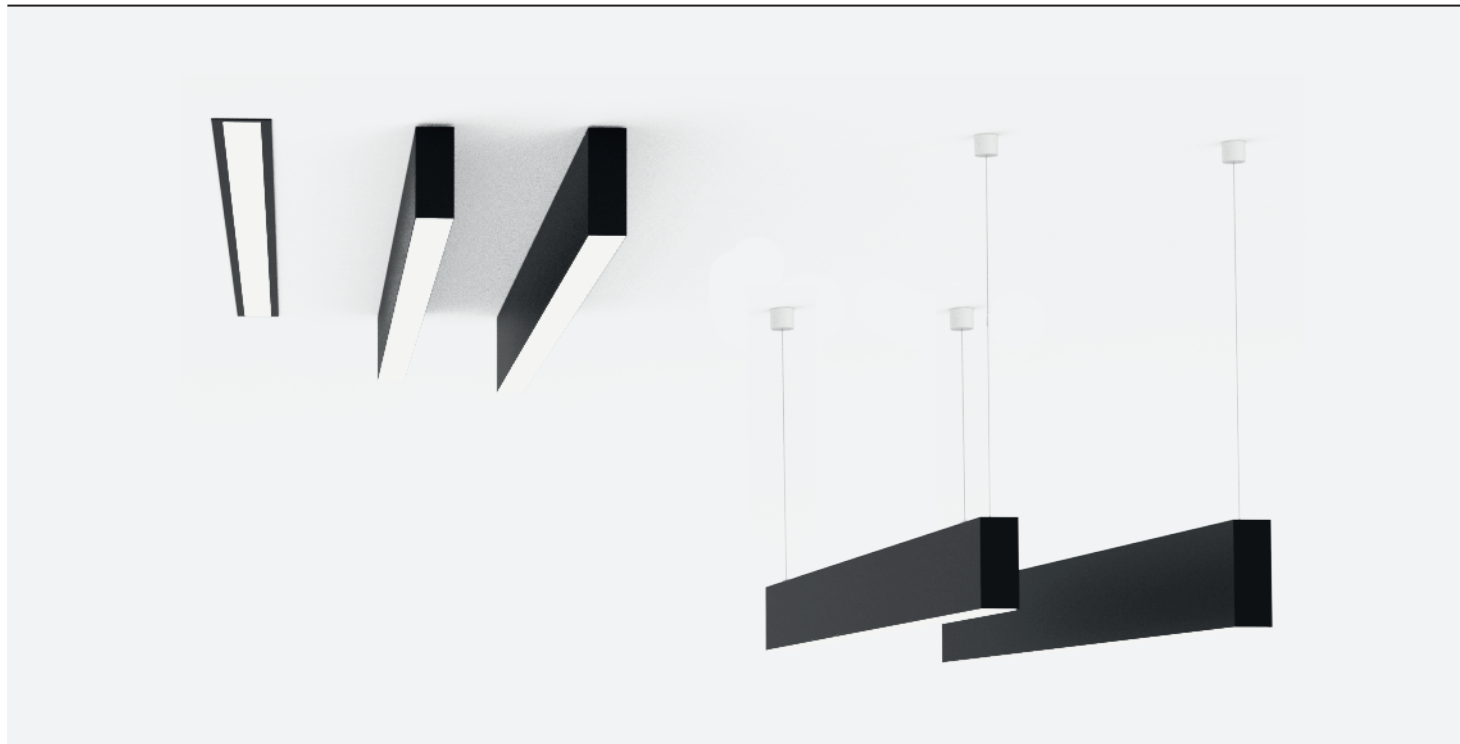
Slim high or compact profile surface luminaire with iGuzzini 48V low voltage track. Compatible with iGuzzini 48V low voltage products.

Material:	Body: Extruded aluminum profile with die-cast end caps.
Mounting:	Surface mounted using anchoring screws. Installs onto a standard 4" octagonal junction box. Supplied with square canopy.
Electrical:	Integral high efficiency electronic LED driver, rated 50 000 hours, 120-277V. Low voltage track option to be used only with iGuzzini 48V low voltage modules.
Dimming:	0-10V (120-277V) or DALI (120-277V) down to 5%.
Finish:	Available in white RAL9003 or black RAL9004. The canopy is supplied white, other finishes available on demand.
Weight:	1.59 lbs/ft (0.72kg/ft)
Warranty:	5 year limited warranty.
Ratings:	IP20, IP00 (track)
Certification:	 cULus listed for dry location.

MADE IN CANADA.


## FAMILY OVERVIEW

Linear small family offers a wide range of mounting and optic options for multiple applications




**PRODUCT COMPATIBILITY**

**iGUZZINI PALCO LOW VOLTAGE SPOTLIGHT\***

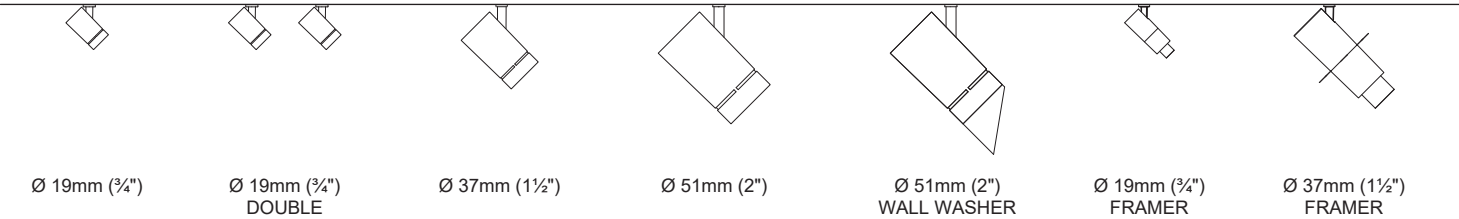


**iGUZZINI LASER BLADE XS LOW VOLTAGE TRACK MODULES\***

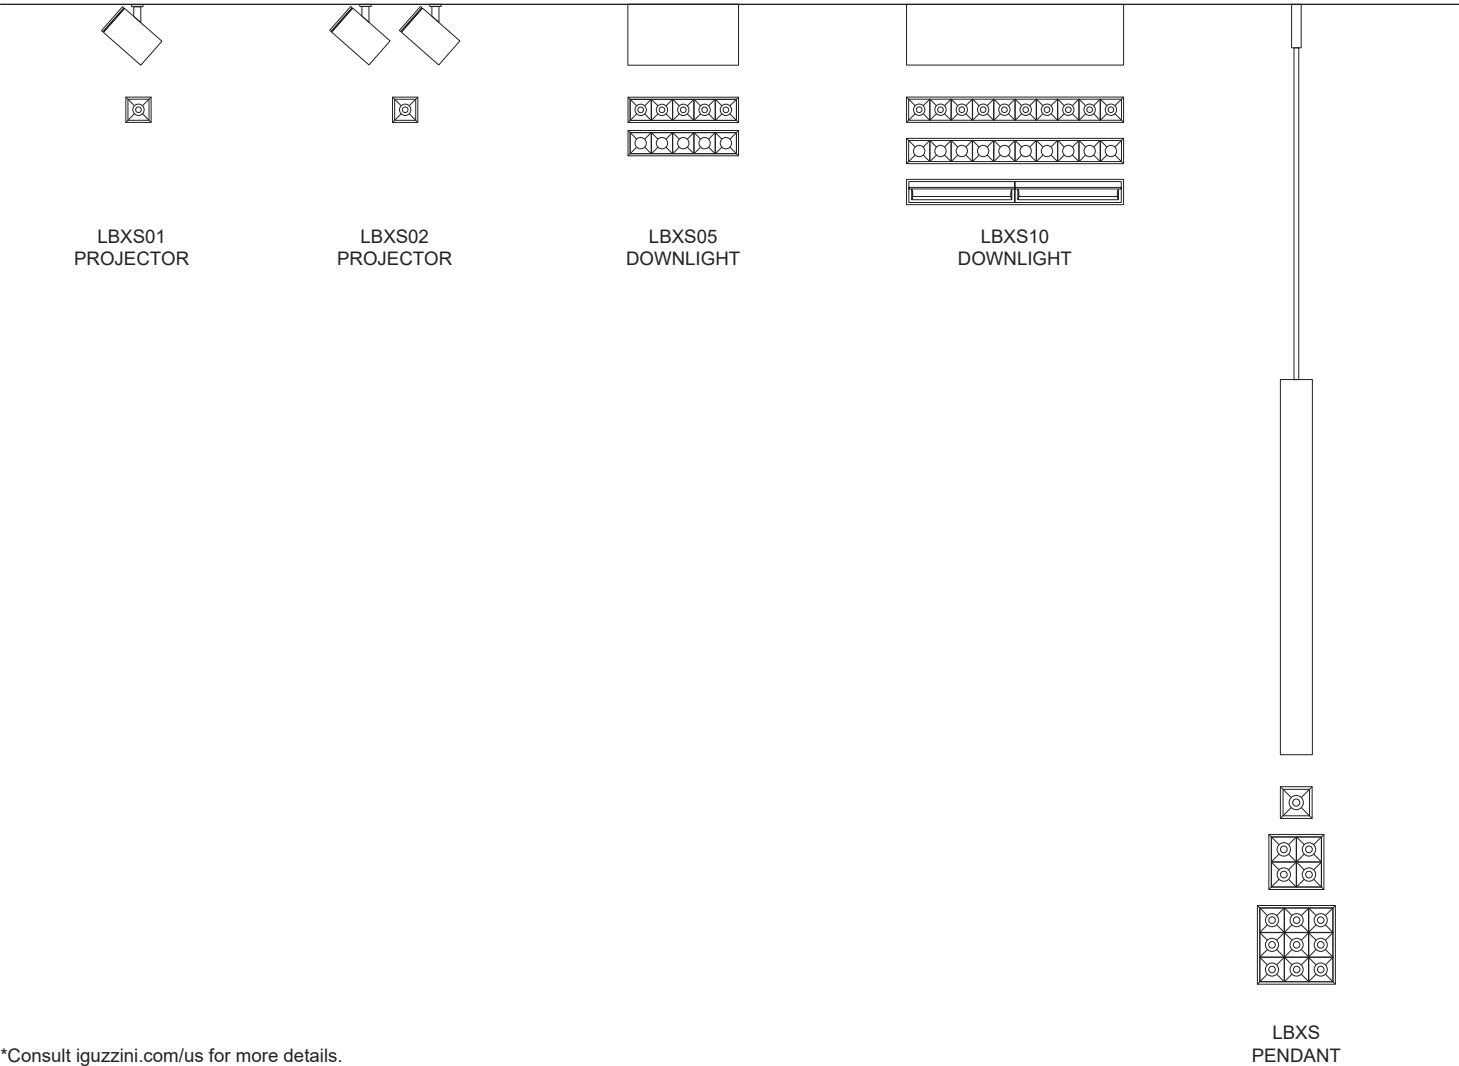


\*Consult [iguzzini.com/us](http://iguzzini.com/us) for more details.

DIMENSIONS

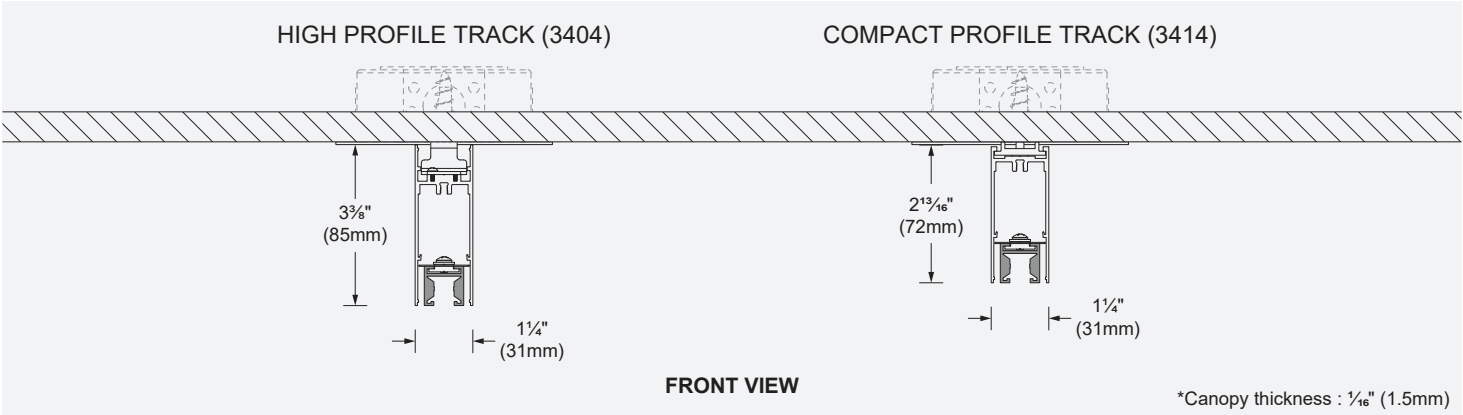

LENGTHS

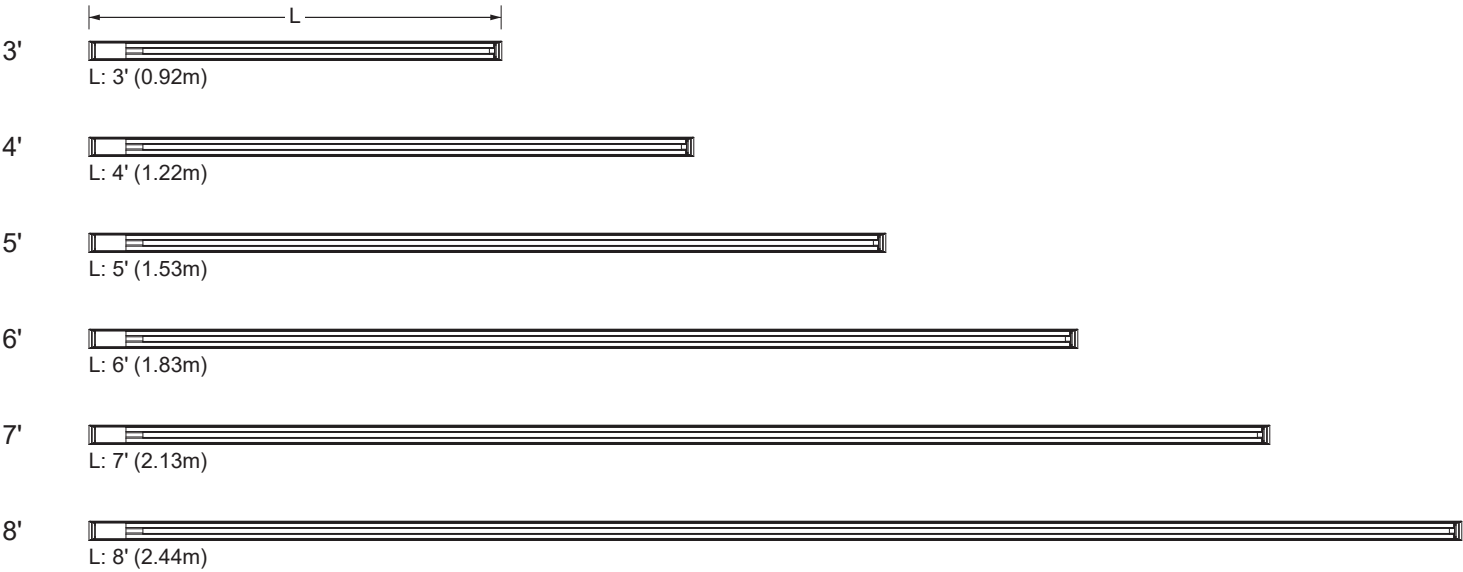

Longer lengths available. See ordering info p.3.

**ORDERING INFO**

- - **LZ T UNV**  
FIXTURE

**MODEL**

☐ **3404** - Surface low voltage high profile track ☐ **3414** - Surface low voltage compact profile track

**LENGTH**

\_\_\_\_\_ 3' to 96'

**TRACK**

☒ **LZ** - Low voltage 48V

☒ **T** - Track

**VOLTAGE**

☒ **UNV** - 120-277V

**FINISH**

☐ **01** - White ☐ **02** - Black

**DIMMING**

☐ **D10** - 0-10V (down to 5%) ☐ **DA** - Dali (down to 5%)