


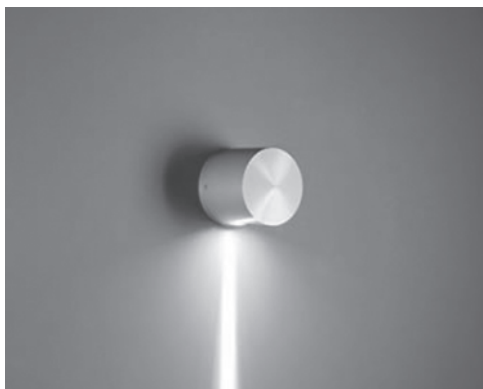


Collection of wall mounted luminaires for exterior applications. Blitz has an innovative optical system that produces pleasing graphic effects. The combination of several fixtures offer a variety of geometric light patterns.

Luminaire characteristics:

Power input: 18.5W
Lumens: 60lm to 285lm (for 3000K, 90CRI)
Luminaire efficacy: Up to 15lm/W

Source:	White LED, (LM-80 tested) 3000K : 90CRI, 4000K : 90CRI.
Lumen maintenance:	70% of initial lumens at 50 000 hours (L70), (LM79 tested).
Optics:	Narrow Spot or Wide Flood beams.
Material:	Body: Die-cast aluminum Diffuser: toughened glass. Hardware: stainless steel screws and silicone gasket.
Mounting:	Install on a standard 4" junction box, or on ground using accessory (see page 4 for details).
Electrical:	Universal high efficiency electronic power supply, rated at 50 000 hours, 120-277V.
Finish:	Aluminum gray painted finish, following a double powder paint in 3 step process: surface treatment containing ceramic nano particles (Bonderite). Epoxy primer paint. Polyester powder paint with high resistance against UV rays and harsh weather conditions.
Weight:	6.4lbs (2.9kg)
Warranty:	5 year limited warranty.
Ratings:	IP65, IK10
Certification:	 cULus listed for wet location.

DIMENSIONS





SIDE VIEW



PHOTOMETRIC DATA

Visit sistemalux.com for complete photometric data.

LOAD (W)	CCT (K)	CRI	OPTIC	LUMENS (lm)	EFFICACY (lm / w)	MAX CANDELA (cd)	MODEL
18.5W	3000K	90	Narrow Spot	60	3	1505	S.4049W
	4000K			65	3	1570	S.4049N
	3000K		Wide Flood	285	15	350	S.4052W
	4000K			295	15	360	S.4052N

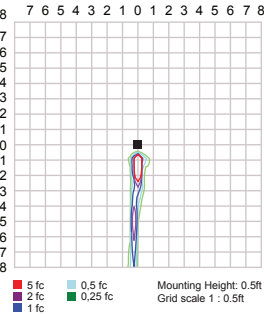

3000K - 90 CRI - Narrow Spot (6°)

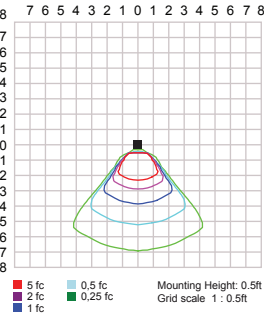

3000K - 90 CRI - Wide Flood (88°)

ORDERING INFO

- **UNV** - **14**

FIXTURE

MODEL

- | | |
|---|---|
| ☐ S.4049W - 3000K, Narrow Spot (6°) | ☐ S.4052W - 3000K, Wide Flood (88°) |
| ☐ S.4049N - 4000K, Narrow Spot (6°) | ☐ S.4052N - 4000K, Wide Flood (88°) |

VOLTAGE

☒ **UNV** - 120-277V

FINISH

☒ **14** - Aluminum gray

ACCESSORIES (TO BE ORDERED SEPARATELY)

- ☐ **S.3554-09** - Black plastic stake 
Total length = 15½" (420 mm).
(The 90 mm upper part must stay out of the ground level)