LOFT ROUND
WALL LED

Project name:

Type:

Wall mounted luminaire with excellent light control, characteristics gives improved lighting design solutions and precision with glare-free effects outside the declared angle of light emission.

Luminaire characteristics:
Power input: 16W
Lumens: 833 to 847 lm
Luminaire efficacy: 52 lm/W

Source: White LED, LM-80 tested.
3000K: 90CRI.
4000K: 90CRI.
Lumen maintenance: >70% of initial lumens at > 50 000 hours (L70), (LM-79 tested).

Optics: 7º or 28º beam angle.

Material:
Body: die-cast aluminum.
Reflector: 99.98% pure anodized aluminum.
Diffuser: clear toughened glass.
Hardware: stainless steel screws and silicone gasket.

Electrical: Integral universal high efficiency electronic power supply, rated at 50 000 hours. 120-277V.

Mounting: Install on a standard 4" Jbox.

Finish: White or aluminum gray.

Weight: 6.2lbs (2.8kg).

Warranty: 5 year limited warranty.

Certification: cULus listed for wet location.

Ratings: IP65, IK06

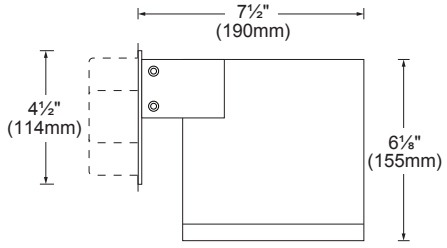

SIDE VIEW

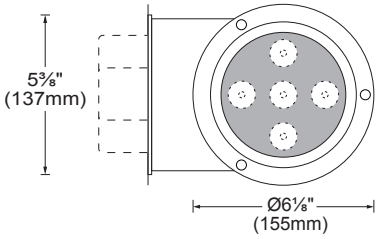

BOTTOM VIEW

SISTEMALUX

9320 Boul. St-Laurent, suite 100, Montréal (Québec)
Canada H2N 1N7
P.: 514.523.1339 F.: 514.525.6107
www.sistemalux.com

TECHNICAL DATA

LOAD (W)	CCT (K)	CRI	OPTIC	DELIVERED LUMENS (lm)	LUMINAIRE EFFICACY (lm / w)	CENTER BEAM CANDLE POWER (cd)	MODEL
16W	3000K	90	28°	833	52	3330	S.6680W
			7°	847	52	30446	S.6689W

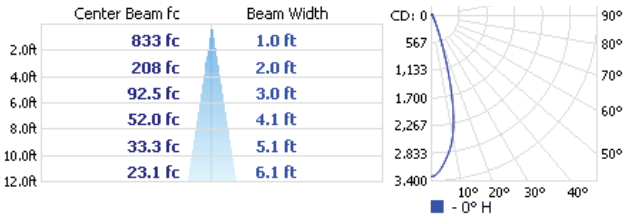

3000K - 90 CRI - 28°

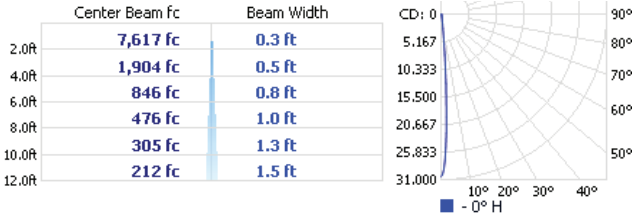

3000K - 90 CRI - 7°

ORDERING INFO

RESET

- UNV -

MODEL | VOLTAGE | FINISH

MODEL

- ◯ **S.6680N -** 4000K, 28°
- ◯ **S.6680W -** 3000K, 28°
- ◯ **S.6689N -** 4000K, 7°
- ◯ **S.6689W -** 3000K, 7°

VOLTAGE

- ● **UNV -** 120-277V

FINISH

- ◯ **01 -** White
- ◯ **14 -** Aluminum gray

SISTEMALUX

9320 Boul. St-Laurent, suite 100, Montréal (Québec)
Canada H2N 1N7
P.: 514.523.1339 F.: 514.525.6107
www.sistemalux.com